





F2009

- FORMATORE AUTOMATICO DI SCATOLE
- FORMEUSE AUTOMATIQUE DE CARTONS
- FORMADORA AUTOMÁTICA DE CAJAS
- AUTOMATIC CARTON ERECTING MACHINE
- AUTOMATISCHER KARTONAUFRICHTER

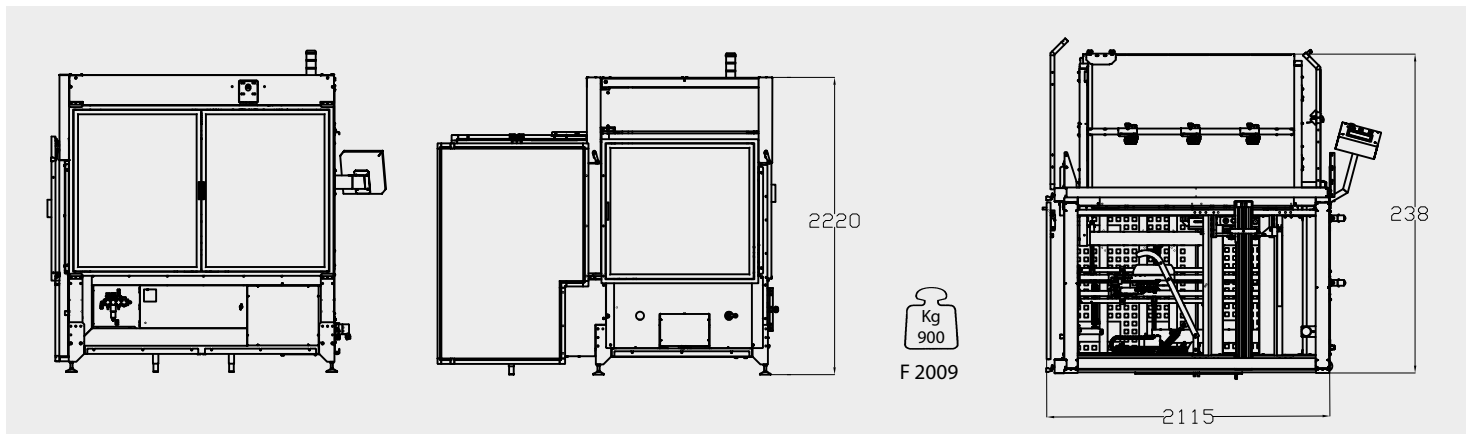

F 2009

	MIN	MAX
L	300 mm	800 mm
W	150 mm	650 mm
H	220 mm	650 mm


- Alimentazione pneumatica
- Pneumatic power supply
- Alimentation pneumatique
- Druckluftspeisung
- Alimentación neumática

6 bar

- Consumo aria per ciclo scatola
- Air consumption cycle box
- Consommation d'air par cycle boîtes
- Luftverbrauch pro Kartonzklus
- Consumo de aire por ciclo caja

22 nl


- Sistema vuoto Venturi: 25m³/h 700mm HG
- Venturi vacuum unit: 25m³/h 700mm HG
- Groupe de vide Venturi: 25m³/h 700mm HG
- Vakuum Venturi Gruppe: 25m³/h 700mm HG
- Equipo de vacío Venturi: 25m³/h 700mm HG



- Alimentazione: 3Ph+PE a richiesta altre alimentazioni
- Power supply: 3Ph+PE other power supplies on demand
- Alimentation: 3Ph+PE autres alimentations sur demande
- Speisung: 3Ph+PE andere lieferungen auf anfrage
- Alimentación: 3Ph+PE otros suministros a petición
- Potenza installata: 1,5 kW
- Installed power: 1,5 kW
- Puissance installée: 1,5 kW
- Eingerichtete Leistung: 1,5 kW
- Potencia instalada: 1,5 kW
- Protezione elettrica: IP54
- Electrical protection: IP54
- Protection électrique: IP54
- Stromschutz: IP54
- Protección eléctrica: IP54

OPTIONALS:

- CAR 2012 Magazzino motorizzato con capacità da 220 scatole
- CAR 2012 Motorised box loader with capacity of 220 boxes
- CAR 2012 Magasin de caisses vides avec une capacité de 220 caisses
- CAR 2012 Motorisiertes Magazin für 220 Faltkartons
- CAR 2012 Almacén motorizado con 220 cajas de capacidad



- Produzione media: 450 scatole/ora
- Production moyenne: 450 boîtes/heure
- Producción promedio: 450 cajas/hora
- Average production: 450 boxes/hour
- Durchschnittliche Produktion: 450 Kartons/Std

- Velocità di trasferimento scatola: ~22 mt/min
- Box transfer speed: ~22 mt/min
- Vitesse de transfert de la boîte: ~22 mt/min
- Transportgeschwindigkeit der Kartons: ~22 mt/min
- Velocidad de desplazamiento caja: ~22 mt/min

- PLC con pannello di comando Touch Screen
- PLC with control board Touch Screen
- Platine de commandes Touch screen avec automate
- Touch Screen Steuerungspanel mit SPS
- Panel de control con pantalla táctil



- Nastratrice GEM B670 per chiusura falde inferiori scatola
- Bottom case sealer GEM B670 model to bottom flaps closing
- Scotcheuse de fond des caisses GEM B670
- Unterbodenverschließmaschine GEM B670 Model
- Precintadora de fondos de cajas GEM B670



Distributed by



COMARME S.r.l. a socio unico

sede operativa (factory)

Quartiere Mirabella snc, 20081 Abbiategrasso (MI) - ITALY

Tel. +39 02 9422002 - Fax +39 02 9422096

e-mail: info@comarmesrl.com - website: www.comarmesrl.com